

# INSTALLATION INSTRUCTIONS

For Model 8765

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

## HANGING THE FIXTURE (Fig. 1)

1. Shut off the power at the circuit breaker and remove old fixture.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Place the Fixture(C) to the post (E), and then secure with the 3 Mounting screws (D)
4. Install bulbs. (Type-B, not supplied)
5. Attach the cover (A) to the Fixture by using the 2 Screws (B)

## CONNECTING THE WIRES (Fig. 2)


1. At this point, connect the electrical wires as follows:  
Connect the black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the crossbar using the green screw provided. Tuck the wire connections neatly into the ceiling junction box.

**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

**Your installation is now complete. Return power to the junction box and test the fixture.**

**MIN 90°C SUPPLY CONDUCTOR**

**Fig.1**

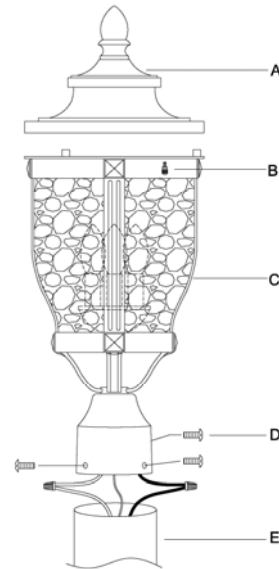

**Fig. 2**

